


DP-60HS Differential Probe

SPECIFICATIONS:

FUNCTION / MODEL	DP-60HS
Range (Switchable)	3 (x 1, x 5, x 10 Attenuator)
Input Impedance	1 M Ω // 10 PF
Bandwidth (-3dB)	x 1: 30 MHz , x 5 : 60 MHz , x 10 : 60 MHz
Maximum Operation Voltage (DC+ AC p-p)	70 Vp-p(x 1: 7 Vp-p , x 5 : 35 Vp-p)
Common Mode Rejection Ratio (CMRR)	60 Hz: > 10000 : 1 100 Hz: > 1000 : 1 1MHz: > 300 : 1
Noise	\leq 1 m Vrms
Accuracy	$\leq \pm$ 2% (DCV or ACV 1 KHz)
Maximum Output Voltage	$\leq \pm$ 4 VDC or \leq 8 Vp-p
Power Source	External 9V DC Adaptor
Other	Over Range Indicator; Separated Design

ACCESSORIES:

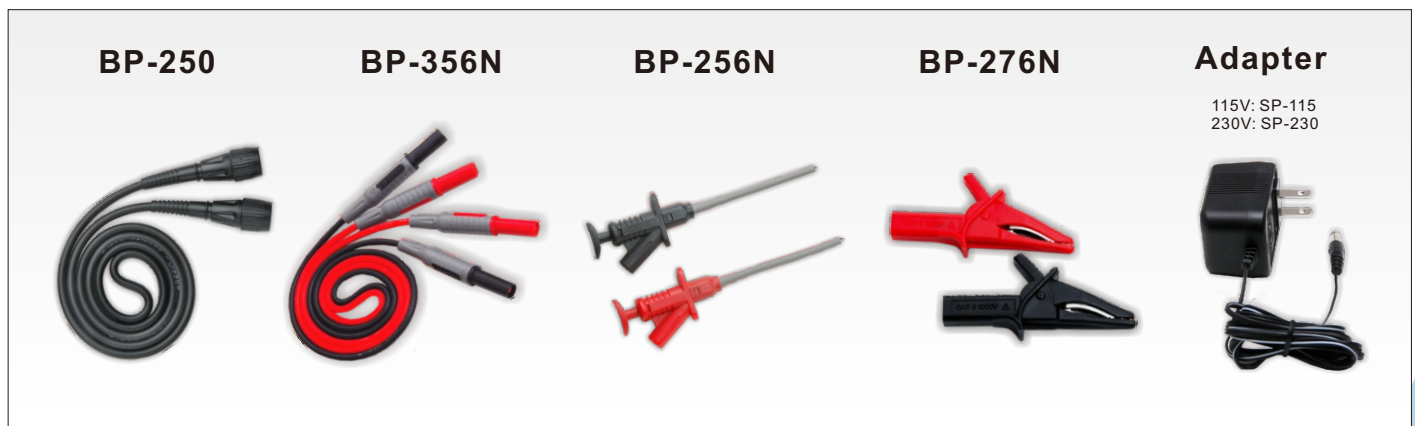

Powertek



For UK & European sales, support, service and deliveries:
Powertek UK Limited, Unit 13B, Southview Park, Marsack St.
Reading, RG4 5AF, United Kingdom

Tel: 01788 519911 Fax: 0870 0940135
E-mail: info@powertekuk.com www.powertekuk.com

For USA sales, support, service and deliveries:
Powertek US Inc. 7 Third St. Holbrook, NY 11741 USA
Tel: +1 (631) 615-6279 Fax: +1 973 273 5893
E-mail: info@powertekus.com www.powertekus.com