

CT75 SERIES 3 PHASE MOULDED CASE CURRENT TRANSFORMERS

DESCRIPTION

Miniature three phase current transformers suitable for primary ranges from 80A-160A with 5A secondary. Supplied with terminal cover and integral foot mount.

APPLICATION

The products have an overall width of 75mm allowing installation directly on top of moulded case circuit breakers. They can also be used independantly in 3 phase applications.




TECHNICAL SPECIFICATION

- Conforms to IEC185, BS 7626, BSEN 60044-1 and IEC 60044-1.
- Rated system voltage 0.72/3kV.
- Ambient temperature range -30°C to 80°C.
- Frequency range 50-60Hz.
- Insulation level 3kV for 1 minute.
- Continuous current 1.2 x rated current.

RANGE

PRIMARY CURRENT	BURDEN AND ACCURACY	PART No.
60A	1VA Class1	CT75F-60/5-1/1
80A	1.5VA Class1	CT75F-80/5-1.5/1
100A	1.5VA Class1	CT75F-100/5-1.5/1
125A	2.5VA Class1	CT75F-125/5-2.5/1
150A	2.5VA Class1	CT75F-150/5-2.5/1
160A	2.5VA Class1	CT75F-160/5-2.5/1

DIMENSIONS (mm)

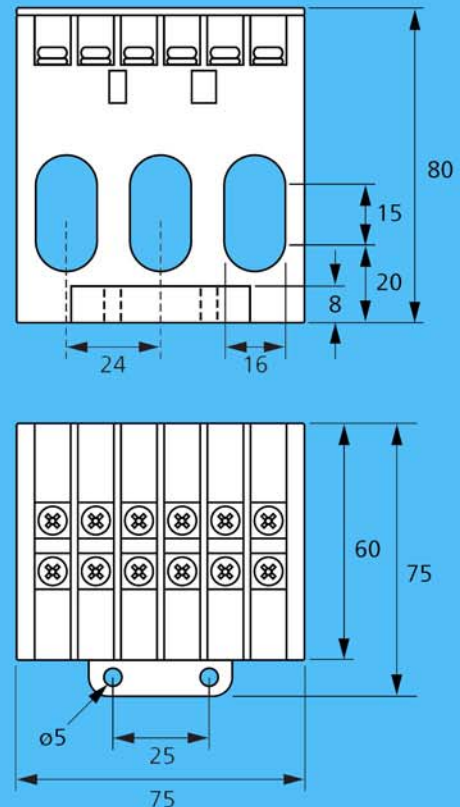

Our policy is one of continuous development and therefore specifications may change without notice.

Powertek

For UK & European sales, support, service and deliveries:

Tel: 01788 519911 Fax: 0870 0940135 Int'l Tel: +44 1788 519911

Email: info@powertekuk.com www.powertekuk.com

For USA sales, support, service and deliveries: Tel: +1 631 744 0294

Email: info@powertekus.com www.powertekus.com